




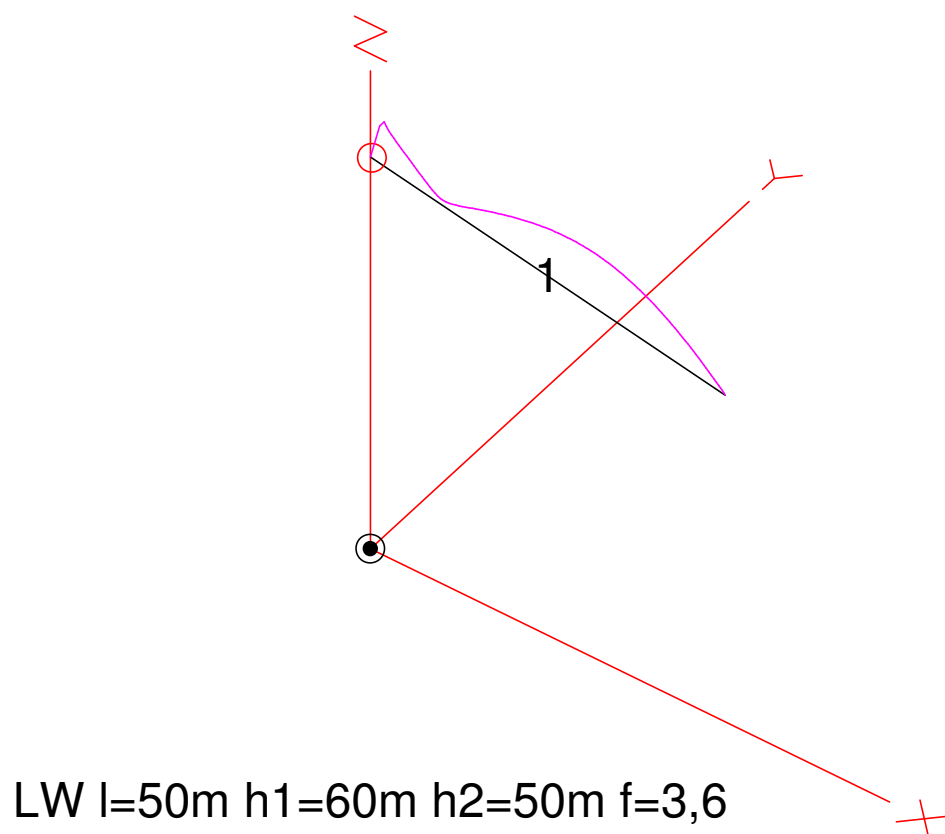

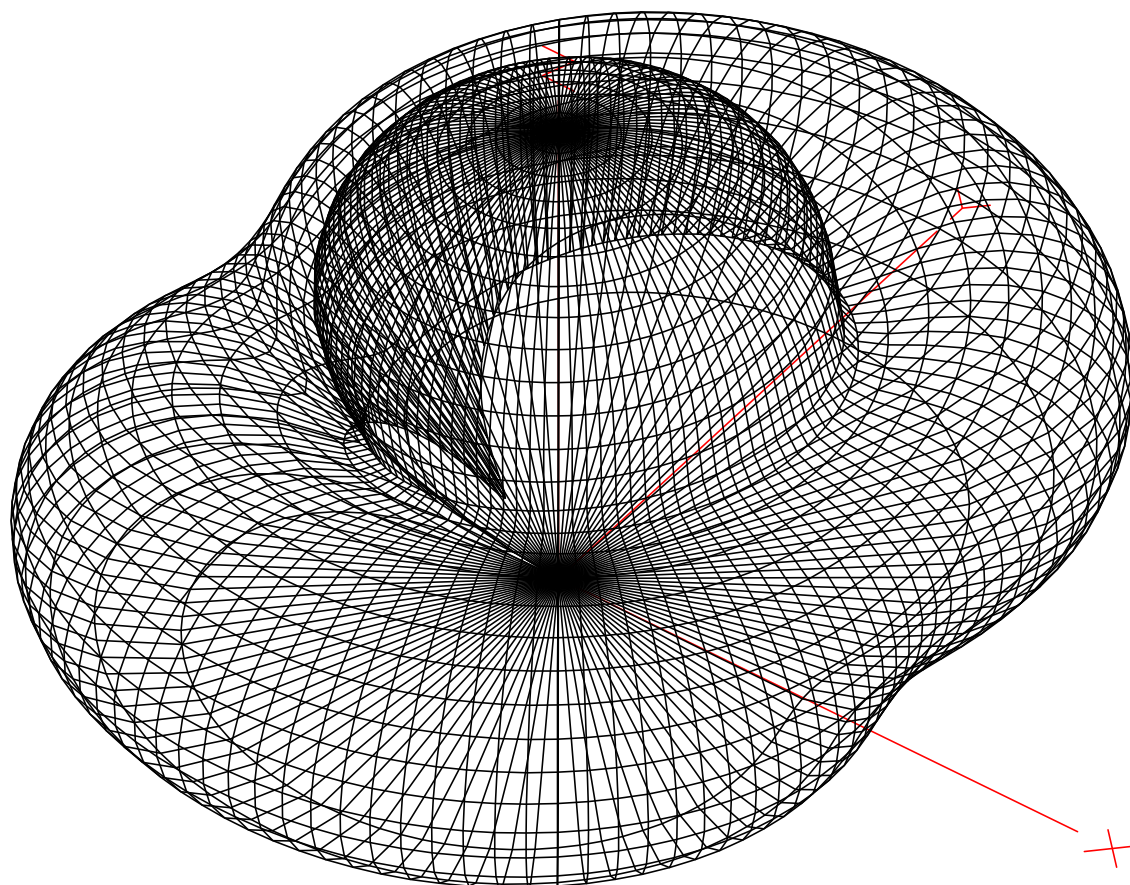

LW $l=50\text{m}$ $h_1=60\text{m}$ $h_2=50\text{m}$ $f=3,6$

*** Total Field**

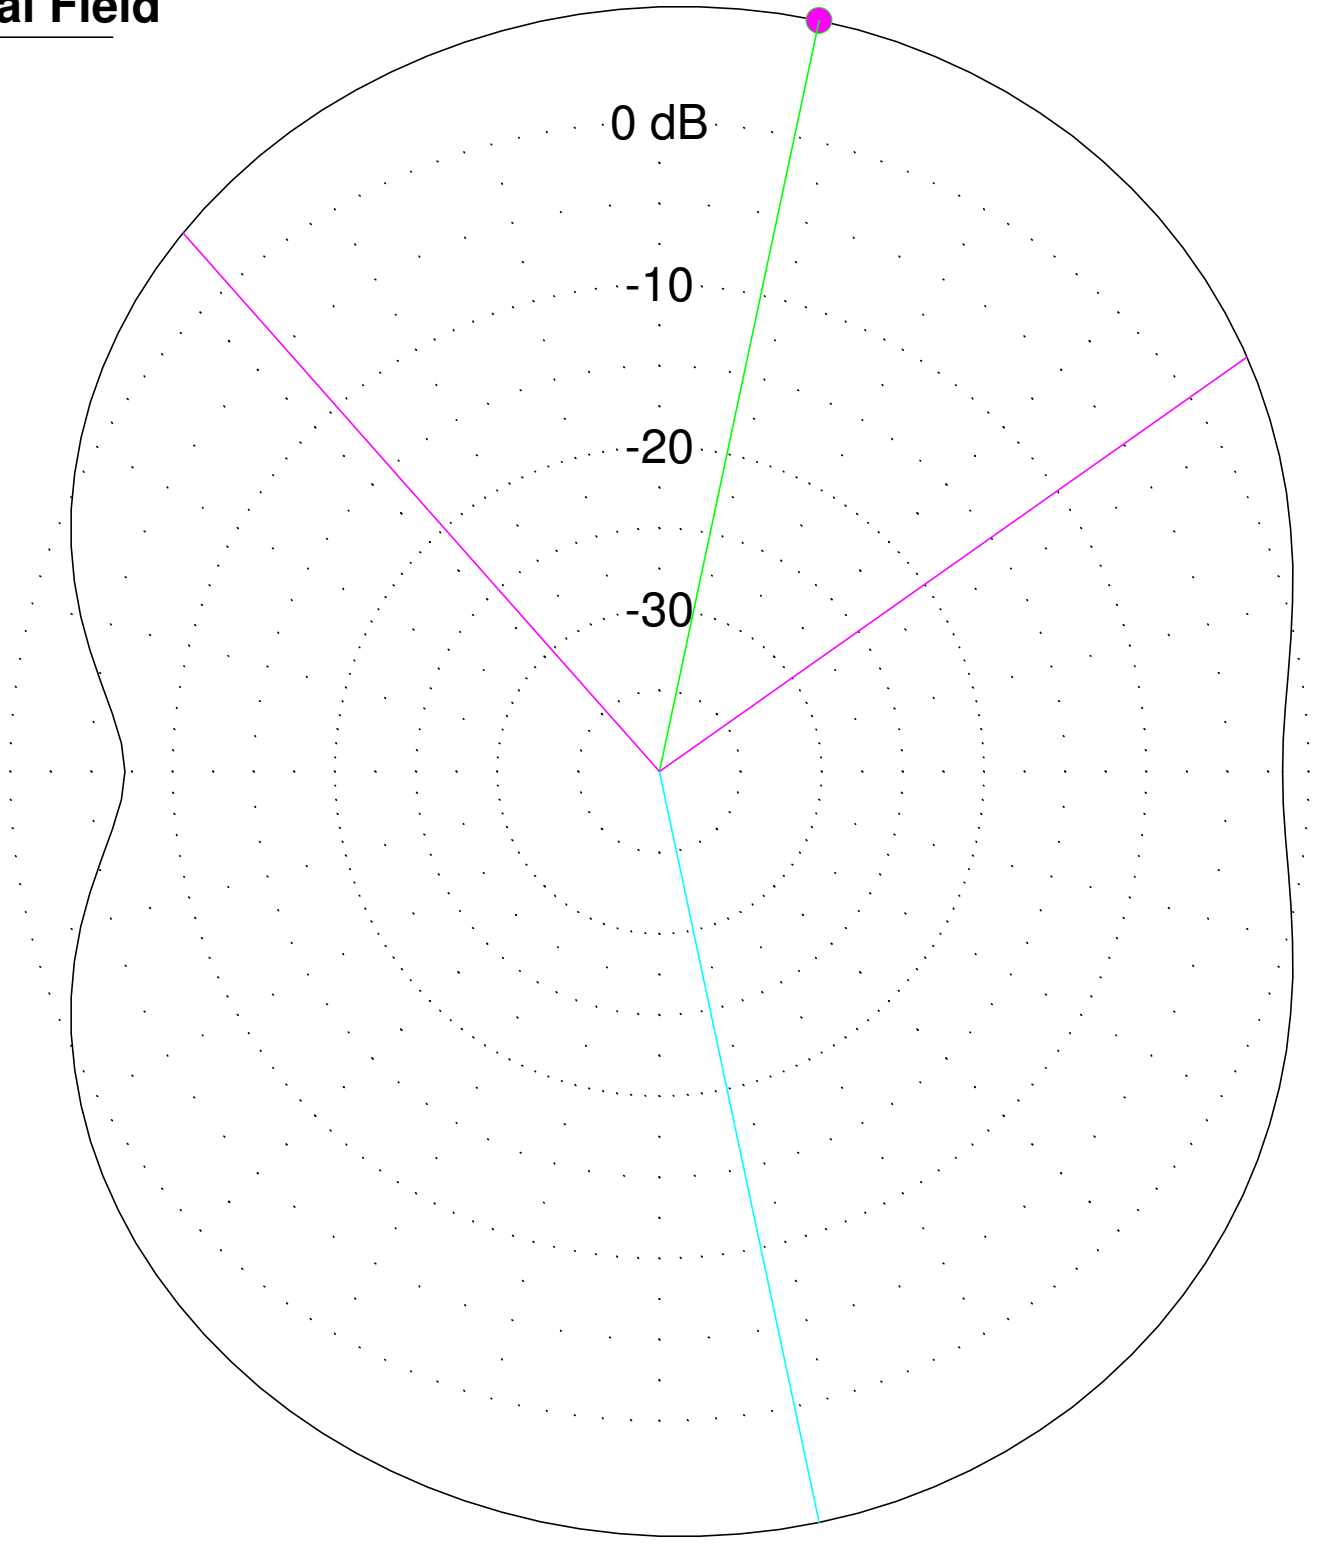


3,6 MHz

LW l=50m h1=60m h2=50m f=3,6

Azimuth Plot
Elevation Angle 21,0 deg.
Outer Ring 0,0 dBi

Cursor Bear 12,0 deg.
Gain 7,3 dBi
0,0 dBmax
0,0 dBmax3D

3D Max Gain 7,3 dBi
Slice Max Gain 7,3 dBi @ Bearing = 12,0 deg.
Front/Back 0,64 dB
Beamwidth 96,3 deg.; -3dB @ 318,5, 54,8 deg.
Sidelobe Gain 7,3 dBi @ Bearing = 168,0 deg.
Front/Sidelobe 0,0 dB

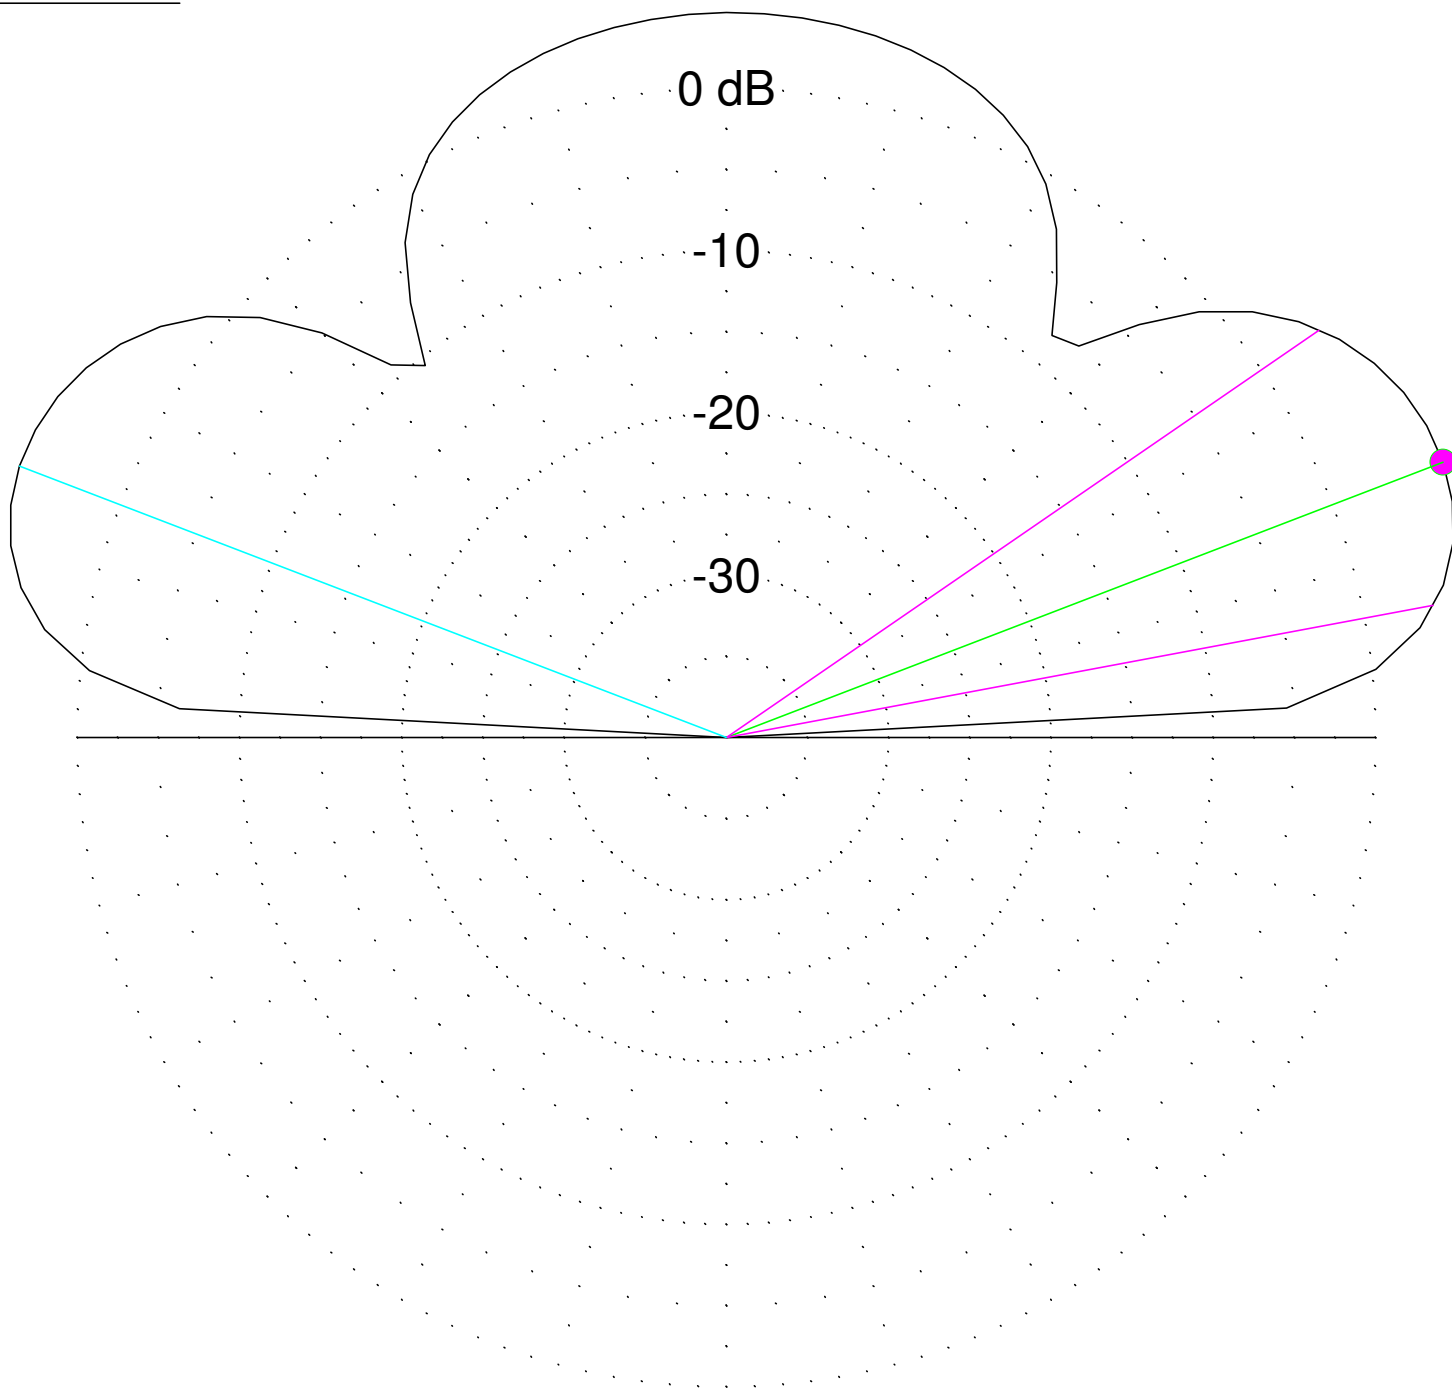

3,6 MHz

LW l=50m h1=60m h2=50m f=3,6

Elevation Plot
Bearing 12,0 deg.
Outer Ring 0,0 dBi

Cursor Elev 21,0 deg.
Gain 7,3 dBi
0,0 dBmax
0,0 dBmax3D

3D Max Gain 7,3 dBi
Slice Max Gain 7,3 dBi @ Elev Angle = 21,0 deg.
Beamwidth 23,9 deg.; -3dB @ 10,6, 34,5 deg.
Sidelobe Gain 6,66 dBi @ Elev Angle = 159,0 deg.
Front/Sidelobe 0,64 dB